


DATASHEET

# Invicta

SRFW082 • flexiiANT®

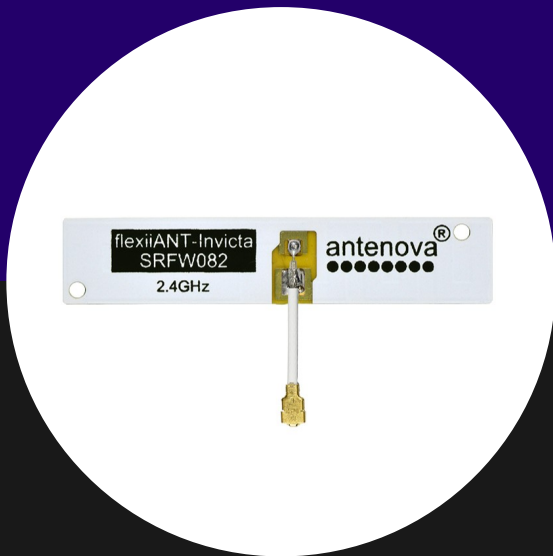

## Features

- Antenna for 2.4 – 2.5 GHz applications: Wi-Fi®, Bluetooth®, and Zigbee®
- Self-Adhesive mounted
- 1.13mm diameter RF cable with I-PEX MHF connector
- Maintains high performance within device: DFI (Designed For Integration)
- Quick integration shortens design cycle
- High efficiency
- 100mm cable standard length – (other lengths available)

Note: This product is compatible with Bluetooth® technology but does not incorporate Bluetooth® technology

# 1. Description

---

Invicta is intended for long-range Wi-Fi and Bluetooth® applications. It is a flexible PCB antenna with cable that enables a 'plug and play' connection to the host PCB. This product is designed for high efficiency within a small overall area. It covers the Wi-Fi®/Bluetooth®/Zigbee® band: 2.4-2.5 GHz.

# 2. Applications

---

- WiFi Access Points
- Portable Bluetooth® Devices
- Zigbee Wireless Data Networks
- Drone Controllers at 2.45GHz
- Home automation & smart appliances
- Utility meters and Smart meters
- Wireless sensor networks
- Smoke and intruder alarms
- Wearable devices
- Building automation
- Industrial controls

# 3. General data

---

Frequency	2400-2500 MHz
Polarization	Linear
Operating temperature	-40°C to +85°C
Environmental condition test	ISO16750-4 5.1.1./5.1.2
Impedance with matching	50 Ω
Weight	<0.5g
Antenna type	FPC Self-adhesive 3M 468MP
Dimensions	30.0 x 6.0 x 0.15 (mm)
Connection	I-PEX MHF1 (20278-112R-13)

## 4. Part number

---

SRFW082



## 5. RF characteristics


---

2400-2500 MHz	
Peak gain	2.8dBi
Average gain (Linear)	-1.5dB
Average efficiency	70%
Maximum return loss	-16dB
Maximum VSWR	1.4:1


All data measured on SRFW082-100 in a loaded condition adhered to a plastic carrier in free space.

## 6. RF performance

### 6.1. Return loss

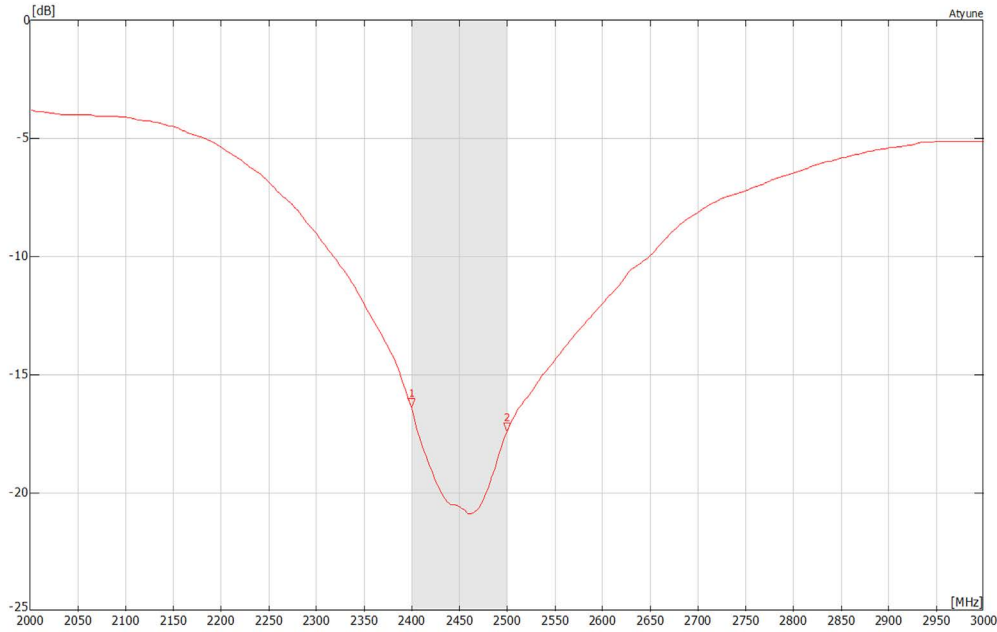


### 6.2. VSWR

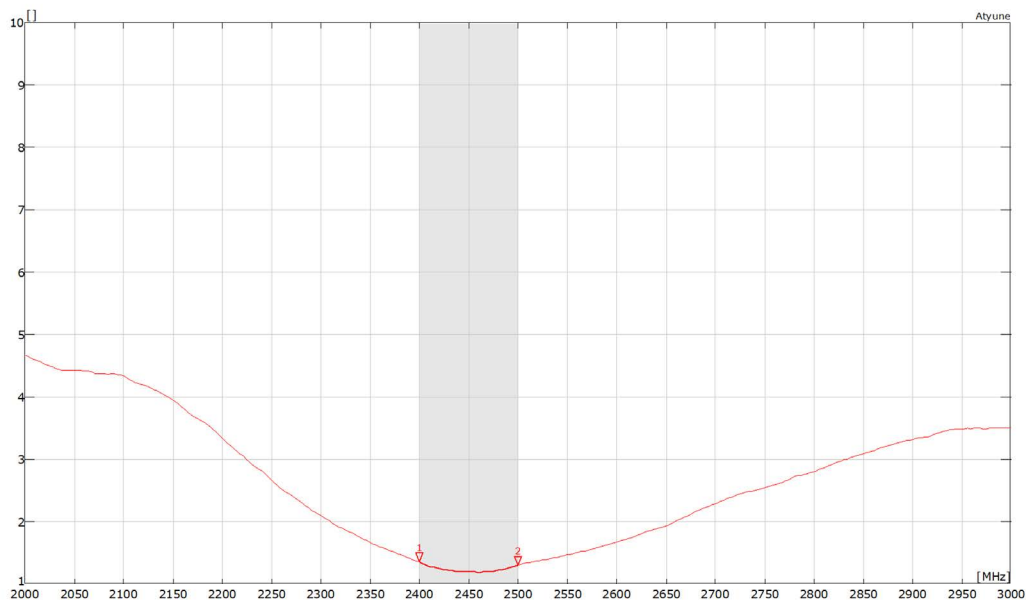

All data measured on SRFW082-100 in a loaded condition adhered to a plastic carrier in free space.

### 6.3. Efficiency




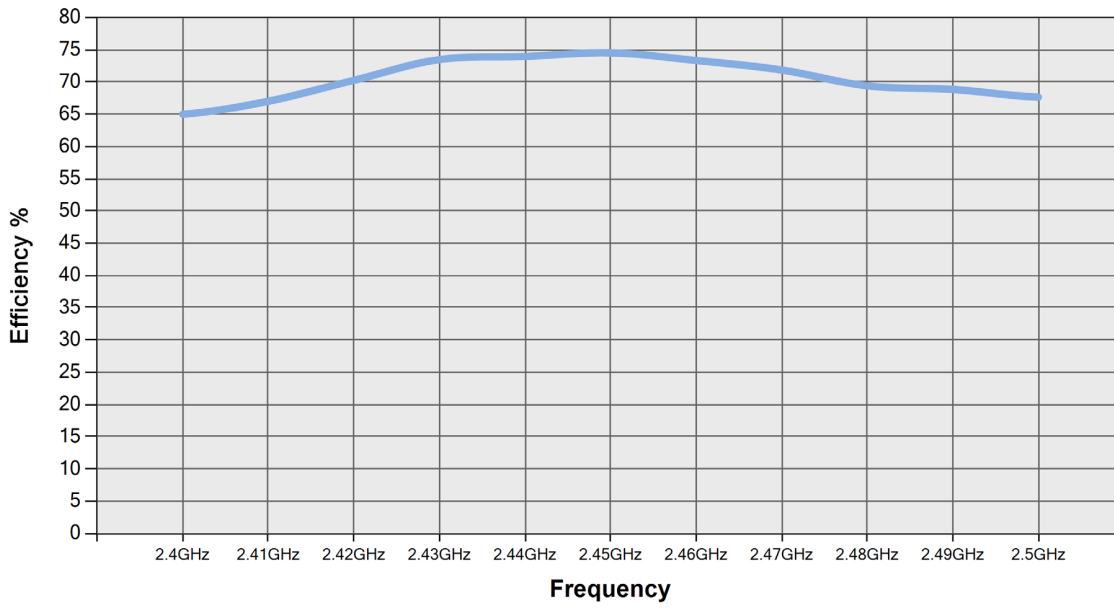


All data measured on SRFW082-100 in a loaded condition adhered to a plastic carrier in free space.

## 6.4. Antenna pattern

### 6.4.1. 2400 MHz – 2500 MHz


3D pattern at 2450MHz

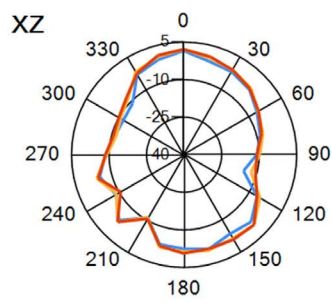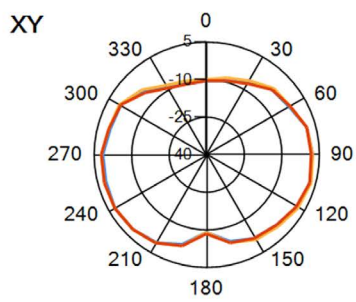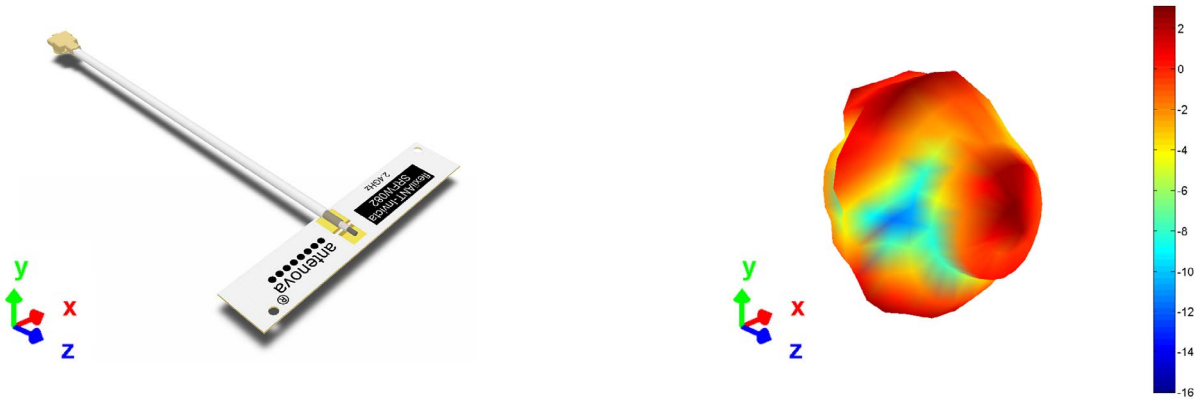

— 2.4GHz — 2.45GHz — 2.5GHz

## 7. Antenna dimensions

### 7.1. Dimensions FPC section

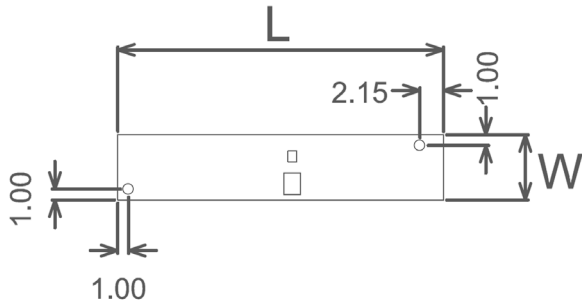

L	W	T
Length	Width	Thickness
30.0 ±0.1	6.0 ±0.1	0.15 (nominal)


All dimensions in (mm)

### 7.2. Dimensions assembled


SRFW082-50	SRFW082-100	SRFW082-150
Length	Length	Length
51.5 ±2.0	101.5 ±2.0	151.5 ±2.0

All dimensions in (mm)

Standard cable length for this antenna is 100mm

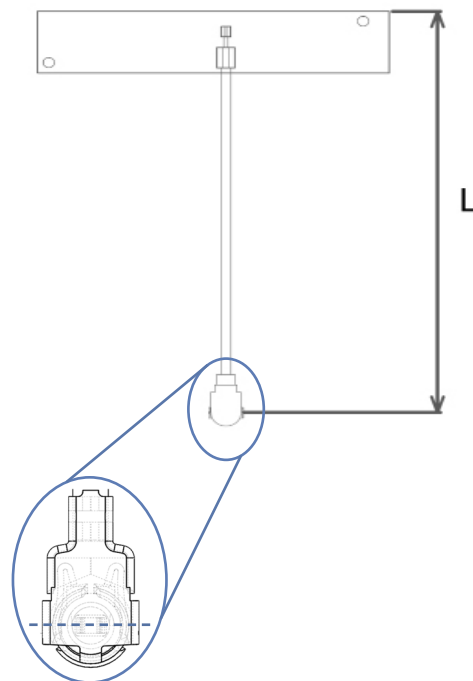


### 7.3. I-PEX connector MHF1 (20278-112R-13)

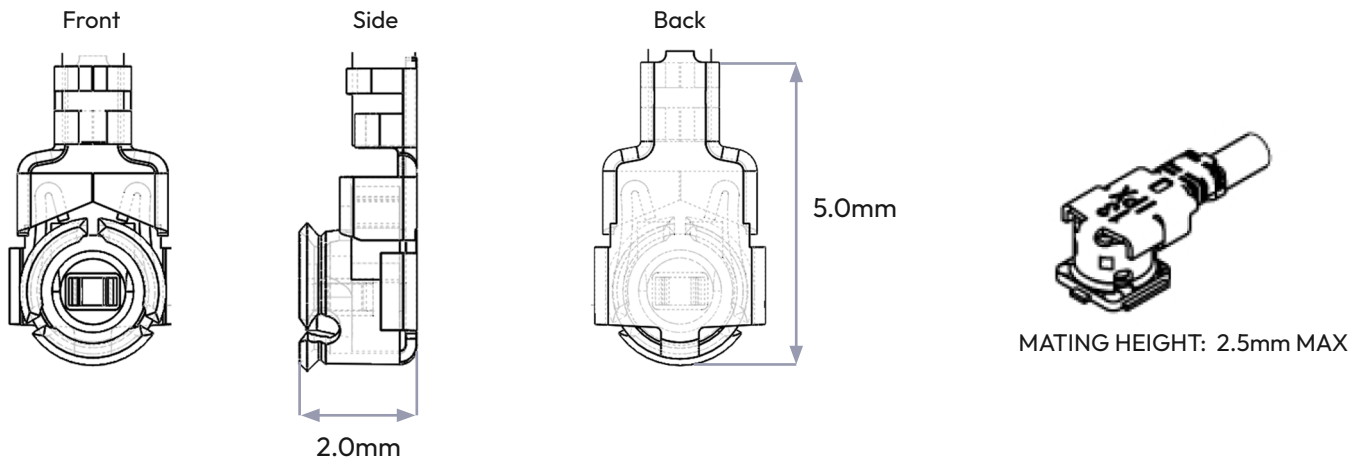

I-PEX	
Material	Copper alloy
Plating	Ag

All dimensions in (mm)

### 7.4. Assembly

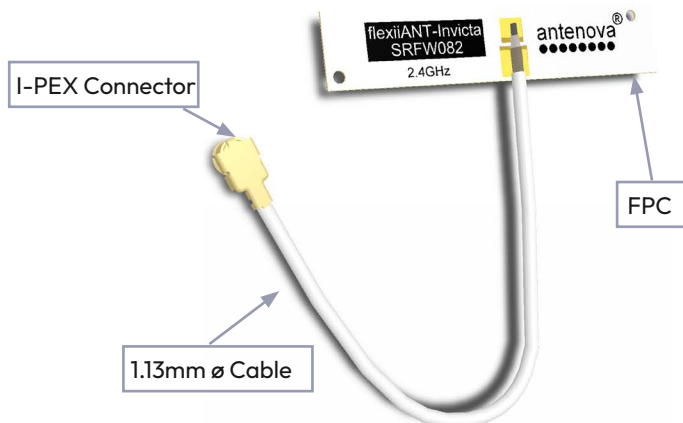

## 8. Electrical interface

---

### 8.1. Host interface

The host PCB requires the mating connector which is the I-PEX MHF (UFL) receptacle. The location should be close to the chip/modules pin for the RF. Any feed from this receptacle should be maintained at 50Ω impedance

### 8.2. Transmission line


- Must have a characteristic impedance of 50Ω.
- Length should be kept to a minimum.
- Is recommended to be a co-planar waveguide: log on to [Antenna.com](https://www.antenna.com) and try our [Transmission line calculator](#) to easily calculate the dimensions most suited to your requirements.
- Should have DC blocking capacitor (e.g. 220pF) placed in line to protect the RF front end.

## 9. Mechanical fixing

---

The antenna uses 3M 468MP adhesive on the reverse side of the FPC. The antenna has an easy access split line to peel off to reveal the adhesive side. It is designed for a one time fix to a clean smooth surface. The antenna is keyed with two 1mm locating holes for easy positioning.

FPC back side

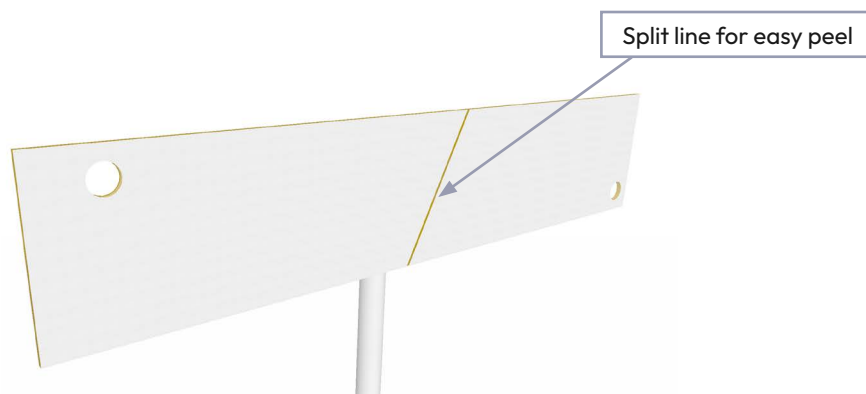

## 10. Antenna integration guide

We recommend the following during the design phase to maximise antenna performance and minimize noise:

- Minimum 4 layer PCB
- Route signals and power internally where possible
- Flood all layers with ground
- Knit ground on all layers together with plenty of vias


Follow placement guidance carefully, in addition Antenova provide technical support to help you through all stages of your design. Register for an account on <https://ask.antenova.com/> to access technical support.

### 10.1. Antenna placement

For FPC antennas the host PCB size is not critical to performance, however consideration must be given to placement. Using six spatial directions, as shown below, the antenna should ideally maintain a minimum of three directions free from obstruction in order to radiate effectively. Where there are obstructions (e.g. PCB, metal parts, battery etc.) a minimum clearance should still be maintained. These minimum clearances are described later in this section.

Six spatial directions relative to FPC

Example with 5 spatial directions clear

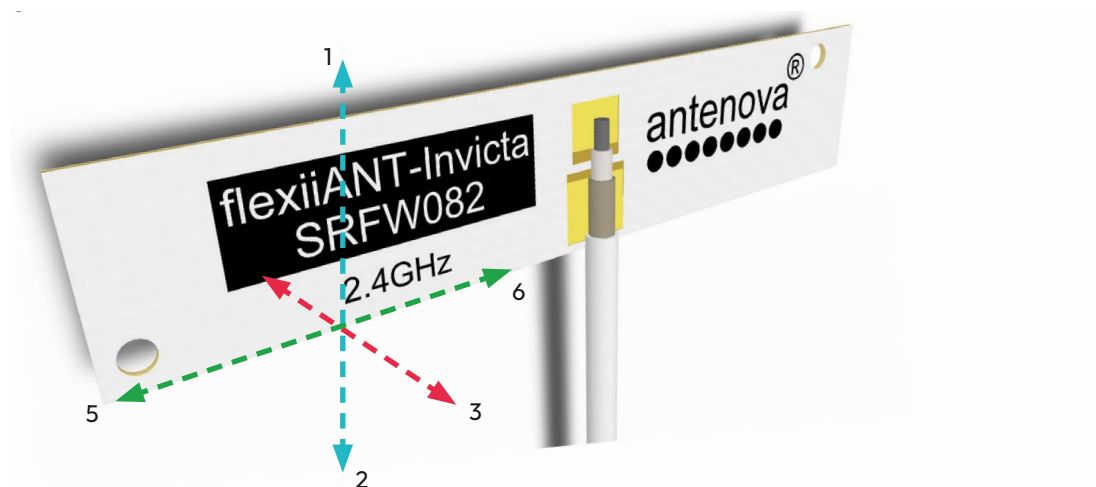


## 10.2. Orientation of FPC


The orientation of the FPC with respect to the host PCB should be defined depending on the unit. The proximity of the GND will have an influence on the antenna so the PCB location relative to the antenna should be considered.

The FPC will normally be placed in one of the three following options for orientation. In each option a distance (d) is the critical dimension to consider. The diagram below shows the minimum value of (d) for each. Other obstructions may increase this dimension.

Vertical mounted

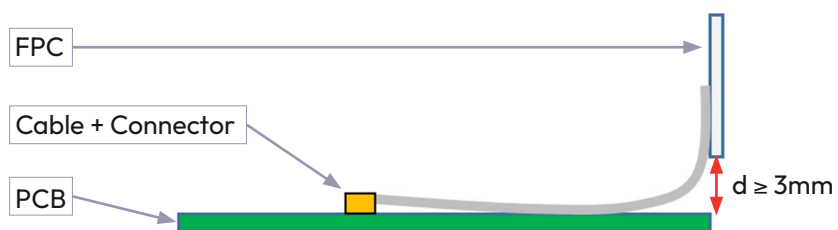

Co-planar to PCB

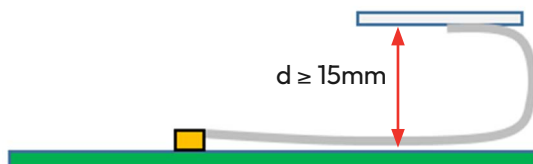

Planar to PCB (Same plane)



## 11. Hazardous material regulation conformance

---


The antenna has been tested to conform to RoHS and REACH requirements. A certificate of conformance is available from Antenova's website.

## 12. Packaging

---

The antennas are stored within a plastic bag of 100 pcs.

100 units per bag (Labelled)

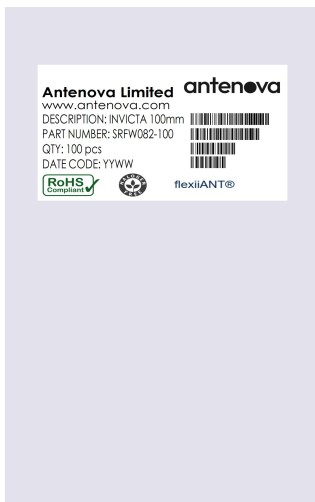

## 12.1. Optimal storage conditions

Temperature	-10°C to 40°C
Humidity	Less than 75% RH
Shelf life	18 Months
Storage place	Away from corrosive gas and direct sunlight
Packaging	Antennas should be stored in unopened sealed manufacturer's plastic packaging.

Note: The shelf life of the antenna is 18 months, provided the bag of 100 pieces remains factory- sealed.

## 12.2. Label information

**Antenova Limited** **antenova**  
[www.antenova.com](http://www.antenova.com)  
 DESCRIPTION: INVICTA 100mm   
 PART NUMBER: SRFW082-100   
 QTY: 100 pcs   
 DATE CODE: YYWW 

  **flexiiANT®**

## Quality statements

Antenova's products conform to REACH and RoHS legislation. For our statements regarding these and other quality standards, please see [antenova.com](https://www.antenova.com).

Antenova reserves all rights to the contents of this document. Antenova gives no warranties based solely on the accuracy or completeness of the contents of this document and reserves the right to make changes to the specifications of the products described herein at any time and without notice.



## Datasheet version

2.01 released 31st OCT 2025

## Antenna design, integration and test resources

Product designers – the details contained in this datasheet will help you to complete your embedded antenna design. Please follow our technical advice carefully to obtain optimum antenna performance.

We aim to support our customers to create high performance wireless products. You will find a wealth of design resources, calculators and case studies to aid your design on our website.

Antenova's design laboratories are equipped with the latest antenna design tools and test chambers. We provide antenna design, test and technical integration services to help you complete your design and obtain the required certifications.

If you cannot find the antenna you require in our product range, please contact us to discuss creating a custom antenna to meet your exact requirements.

Share knowledge with RF Experts around the world

**ask.antenova** is a global forum for  
designers and engineers working with  
wireless technology

[Visit Ask.Antenova](#)

Visit [antenova.com](http://antenova.com)

**Order antenna samples and  
evaluation boards, and read our  
antenna resources**

[Visit antenova.com](#)

Request a volume quotation for antennas:

[sales@antenova.com](mailto:sales@antenova.com)

+ 44 (0) 23 9400 1023

Global headquarters

**Antenova Ltd, 7 The Briars,  
Waterberry Drive, Waterlooville,  
Hampshire, PO7 7YH**