

DATASHEET

# CASI248 - 100

Cable Assembly



# 1. Description

---

- High reliability connectors
- Low loss cable
- Low insertion loss RF connectors
- U.FL receptacle compatible

# 2. Applications

---

## 2.1. SMA Jack Straight Connector

| Electrical                      |                    |
|---------------------------------|--------------------|
| Impedance                       | 50Ω                |
| Frequency Range                 | DC ~ 6GHz          |
| Working Voltage                 | Max $\leq$ 335Vrms |
| Dielectric Withstanding Voltage | 1000 Vrms          |
| Insulation Resistance           | $\geq$ 1000mΩ      |
| Center Contact Resistance       | $\leq$ 10mΩ        |
| Outer Contact Resistance        | $\leq$ 5mΩ         |
| VSWR                            | $\leq$ 1.45        |
| Durability                      | > 500 cycles       |
| Temperature range               | -55°C to +155°C    |

## 2.2. IPEX MHF 1 Connectors


| IPEX part number – 21351-112R-37 |   |
|----------------------------------|---|
| Impedance                        | 50Ω   |
| Frequency Range                  | DC ~ 6GHz                                       |
| Rate Voltage                     | AC 60V  |
| Withstanding Voltage             | AC 200V/minute                                  |
| Insulation Resistance            | $\geq 500\text{m}\Omega/\text{DC } 100\text{V}$ |
| Contact Resistance               | $\leq 20\text{m}\Omega$                         |
| Temperature                      | -40°C to +90°C                                  |
| VSWR                             | $\leq 1.50$                                     |
| Durability                       | 30 cycles                                       |

## 2.3. Cable Specification

| Electrical Characteristics |  |
|----------------------------|--|
| Cable Item                 | 30 AWG O.D 1.37 Black  |
| Capacitance (pF/m)         | 96   |
| Impedance (ohm)            | 50   |
| Velocity (%)               | 70   |
| Min. Bend Radius (mm)      | 4  |
| Max. Oper. Voltage (VMS)   | 1000   |
| Max. Oper. Frequency (MHz) | 6000   |
| Operating Temperature      | -55°C to +200°C  |
| VSWR                       | ≤1.50  |
| Attenuation (dB/100m)      | 1000 MHz - 160dB/100m<br>2000 MHz - 230dB/100m<br>3000 MHz - 290dB/100m<br>4000 MHz - 340dB/100m<br>5000 MHz - 400dB/100m<br>6000 MHz - 430dB/100m |
| Cable length               | 100mm  |

### 3. Cable Insertion Loss

---

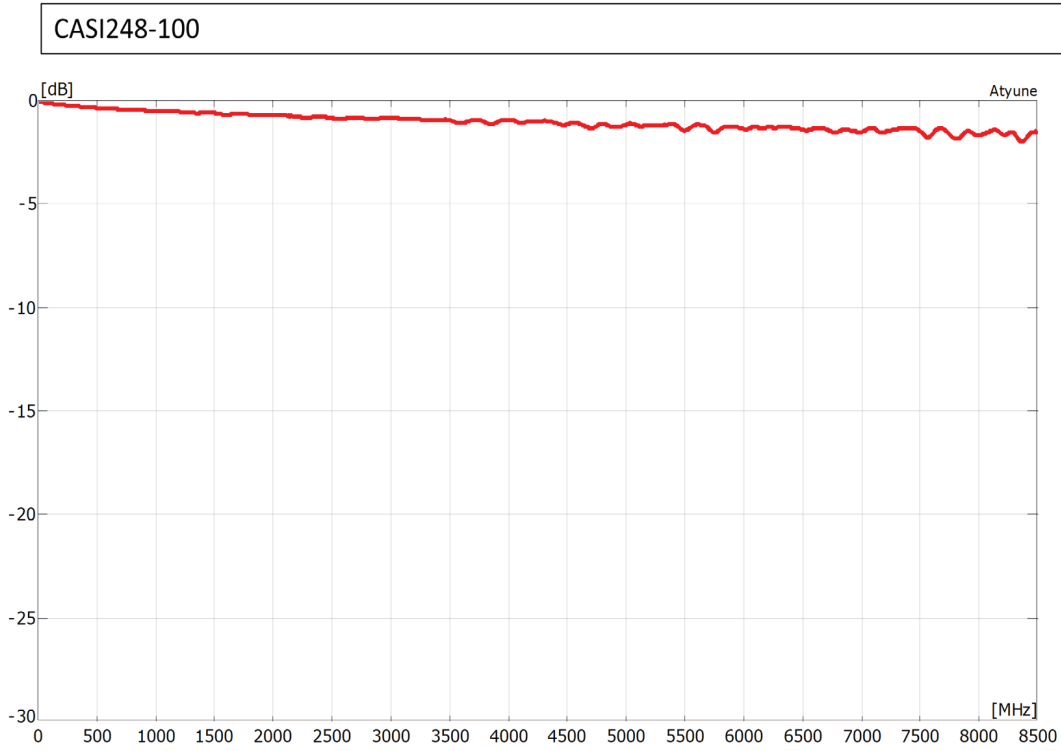


## 4. Part number

CASI248-100


## 5. Drawing

### 5.1. Cable assembly

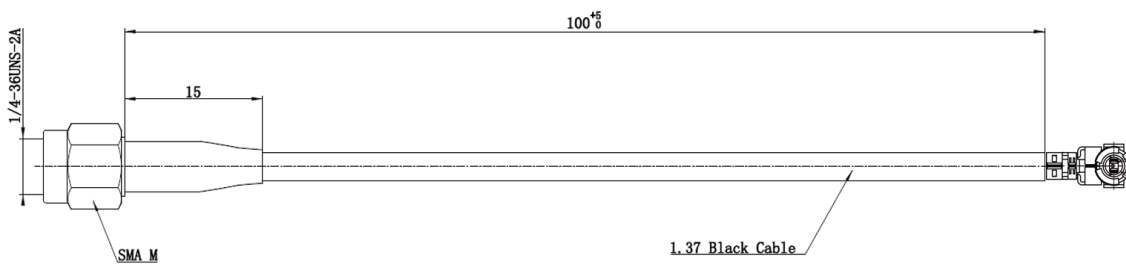


### 5.2. Connectors


connector 1: IPEX MHF1 21351-112R-37

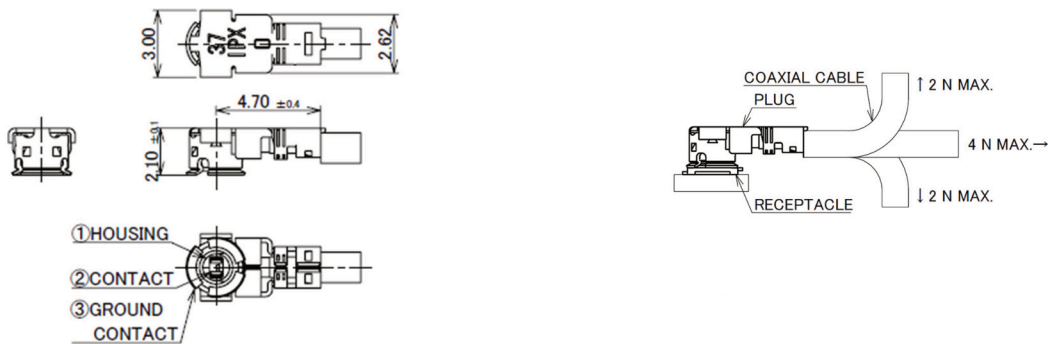

connector 2: :SMA Plug Connector

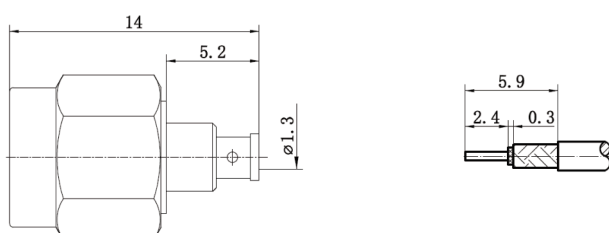

### 5.3. Cable Construction Specification

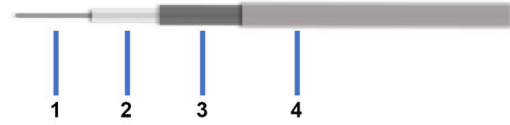

Cable Cross Section

| Item | Description     | Material                        | Diameter (MM) |
|------|-----------------|---------------------------------|---------------|
| 1    | Inner Conductor | Silver plated copper clad steel | 7 x 0.102     |
| 2    | Dielectric      | FEP                             | 0.88          |
| 3    | Outer Conductor | Silver Plated Copper Braid      | 1.10          |
| 4    | Jacket          | FEP                             | 1.37          |

### 5.4. Bill of Material

| Item | Description                 | Material   | Finish | QTY |
|------|-----------------------------|------------|--------|-----|
| 1    | SMA Jack Bulkhead connector | Brass      | Gold   | 1   |
| 2    | IPEX MHF1                   | Brass      | Gold   | 1   |
| 3    | 1.37 Coaxial Cable          | FEP Jacket | Black  | 1   |
| 4    | Heat Shrink Tube            | PE         | Black  | 1   |

## Quality statements

Antenova's products conform to REACH and RoHS legislation. For our statements regarding these and other quality standards, please see [antenova.com](https://www.antenova.com).

Antenova reserves all rights to the contents of this document. Antenova gives no warranties based solely on the accuracy or completeness of the contents of this document and reserves the right to make changes to the specifications of the products described herein at any time and without notice.



Certificate No. 11070  
ISO 9001

## Datasheet version

2.02 release 10th June 2026

## Antenna design, integration and test resources

Product designers – the details contained in this datasheet will help you to complete your embedded antenna design. Please follow our technical advice carefully to obtain optimum antenna performance.

We aim to support our customers to create high performance wireless products. You will find a wealth of design resources, calculators and case studies to aid your design on our website.

Antenova's design laboratories are equipped with the latest antenna design tools and test chambers. We provide antenna design, test and technical integration services to help you complete your design and obtain the required certifications.

If you cannot find the antenna you require in our product range, please contact us to discuss creating a custom antenna to meet your exact requirements.

Share knowledge with RF Experts around the world

**ask.antenova** is a global forum for  
designers and engineers working with  
wireless technology

[Visit Ask.Antenova](#)

Visit [antenova.com](http://antenova.com)

**Order antenna samples and  
evaluation boards, and read our  
antenna resources**

[Visit antenova.com](http://antenova.com)

Request a volume quotation for antennas:

[sales@antenova.com](mailto:sales@antenova.com)

+ 44 (0) 23 9400 1023

Global headquarters

**Antenova Ltd, 7 The Briars,  
Waterberry Drive, Waterlooville,  
Hampshire, PO7 7YH**