

DATASHEET

# Mitis

SRFL026 • flexiiANT®



## Features

- Antenna for 4G LTE applications including MIMO systems.
- LTE 700, GSM850, GSM900, DCS1800, PCS1900, WCDMA2100, LTE B7(2500-2690 MHz), LTE B40 (2300 – 2400 MHz)
- 1.13mm diameter RF cable with I-PEX MHF connector
- Self-adhesive mounted
- Quick and simple integration minimizes design cycle
- Available in two standard cable lengths, 100mm and 200mm, other lengths available

# 1. Description

---

Mitis is intended for use with 4G LTE applications. This product specification shows the performance of this antenna in all workable bands. The antenna offers easy integration with plug and play simplicity.

# 2. Applications

---

- Smart meters
- Network devices
- Femto / Pico base stations
- Telematics
- Remote monitoring
- Machine to Machine
- POS (Point of Sale) terminals

# 3. Part number

---

SRFL026



## 4. General data

Frequency	698-798MHz 824-960MHz 1710-2170MHz 2300-2400MHz 2500-2690MHz
Polarization	Linear
Operating temperature	-40°C to +85°C
Environmental condition test	ISO16750-4 5.1.1./5.1.2
Impedance with matching	50 $\Omega$
Weight	<0.5g
Antenna type	FPC Self-adhesive 3M 468MP
Dimensions antenna	110.0 x 20.0 x 0.15 (mm)
Connection	I-PEX MHF1 (20278-112R-13)

## 5. RF characteristics

	698 – 798 MHz	824 – 960 MHz	1710 – 2170 MHz
Peak gain	2.50dBi	2.30dBi	3.50dBi
Average gain (Linear)	-1.50dBi	-1.60dBi	-1.70dBi
Average efficiency	>55%	>65%	>65%
Maximum return loss	-5.5dB	-10.0dB	-7.0dB
Maximum VSWR	3.20:1	1.95:1	1.90:1


	2300 – 2400 MHz	2500 – 2690 MHz
Peak gain	4.00dBi	4.50dBi
Average gain (Linear)	-1.70dBi	-1.40dBi
Average efficiency	>55%	>70%
Maximum return loss	-7.0dB	-5.5dB
Maximum VSWR	2.10:1	3.10:1

All data measured in a loaded condition adhered to a 1.6mm thick plastic carrier free space.


An RF choke was used to prevent cable radiation.

# 6. RF performance


## 6.1 Return loss

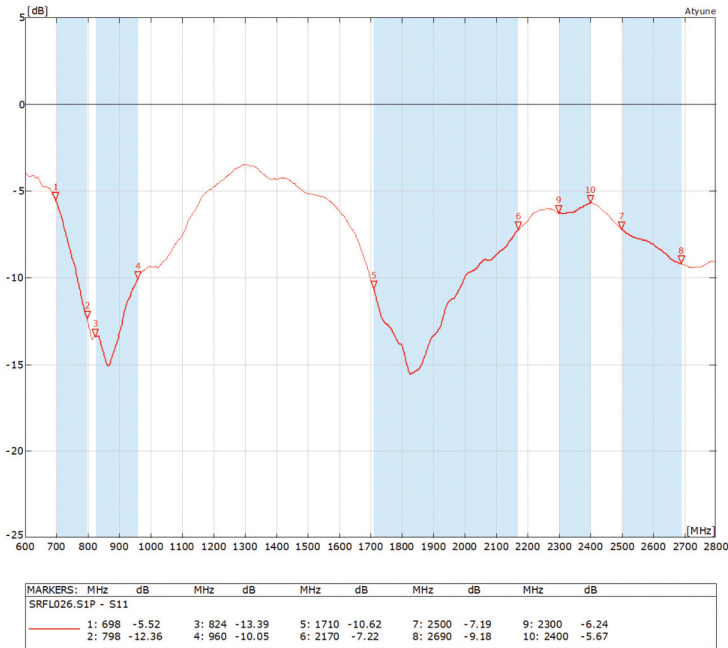

## 6.2 VSWR

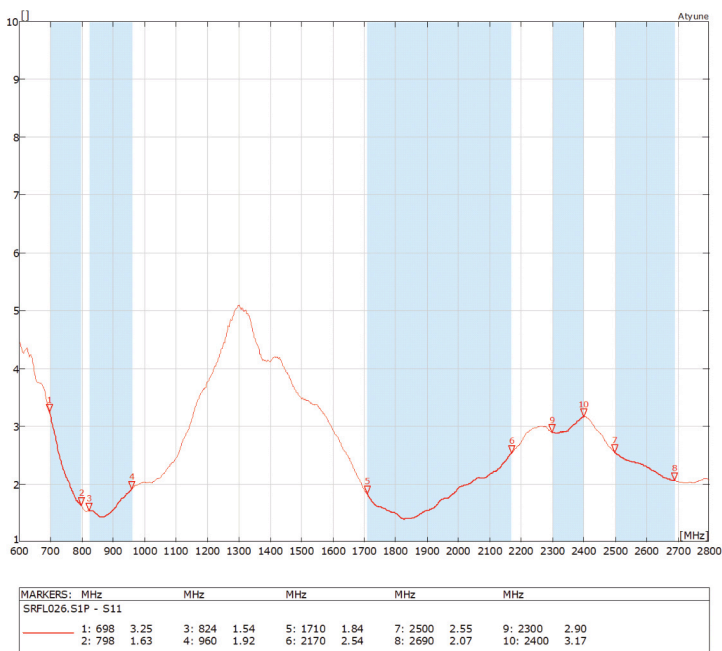

### 6.3. Efficiency

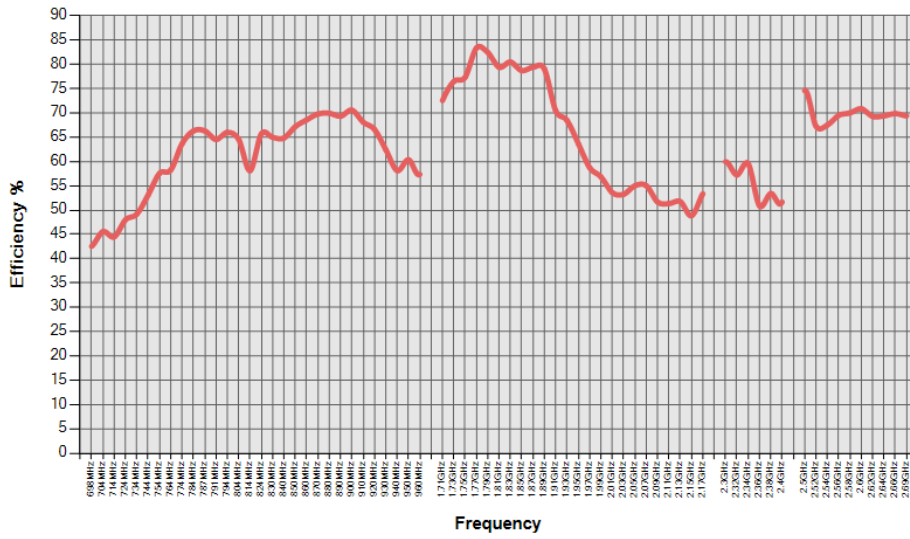


All data measured on SRF026-100 in a loaded condition adhered to a plastic carrier in free space.


## 6.4. Antenna pattern

### 6.4.1. 698 MHz – 798 MHz


3D pattern at 745 MHz

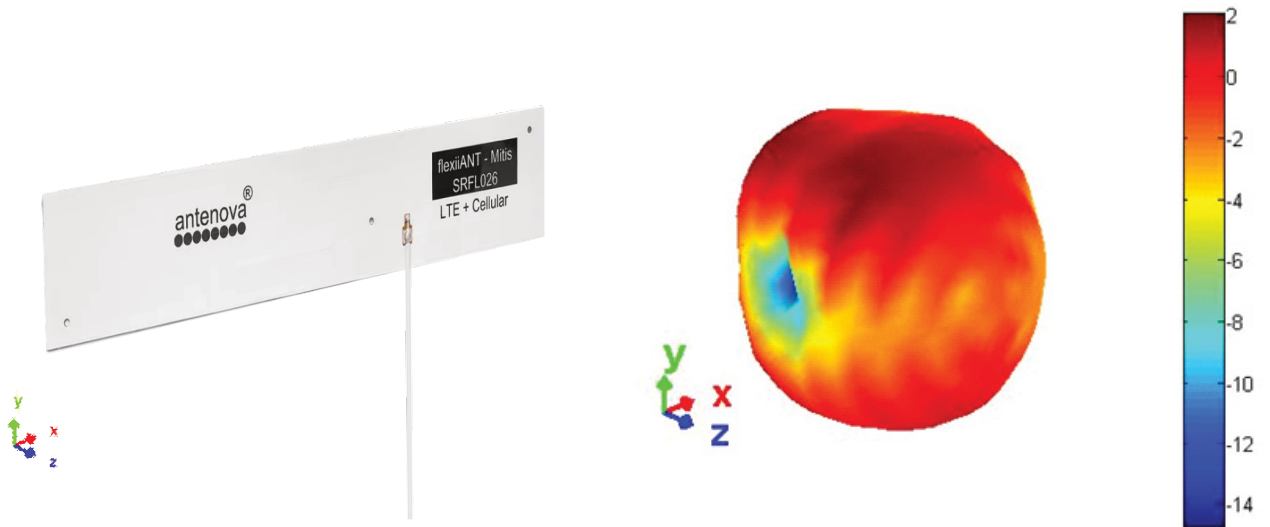


XY

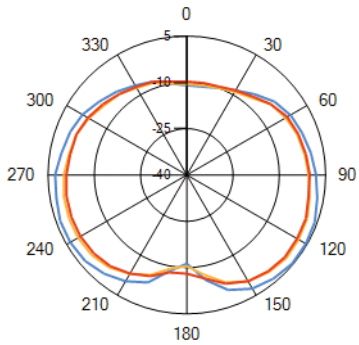

XZ

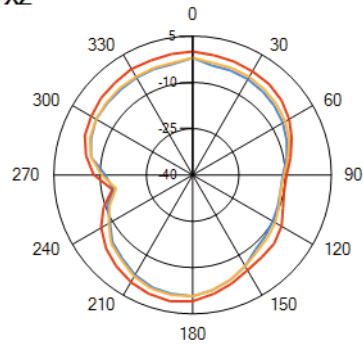


YZ

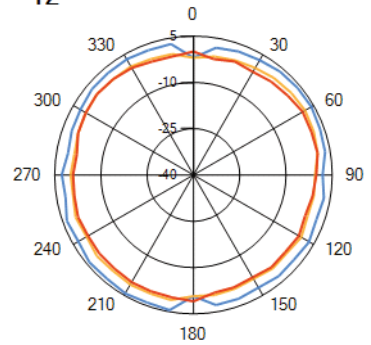


— 724MHz — 754MHz — 794MHz

### 6.4.2. 824 MHz – 960 MHz


3D pattern at 890 MHz

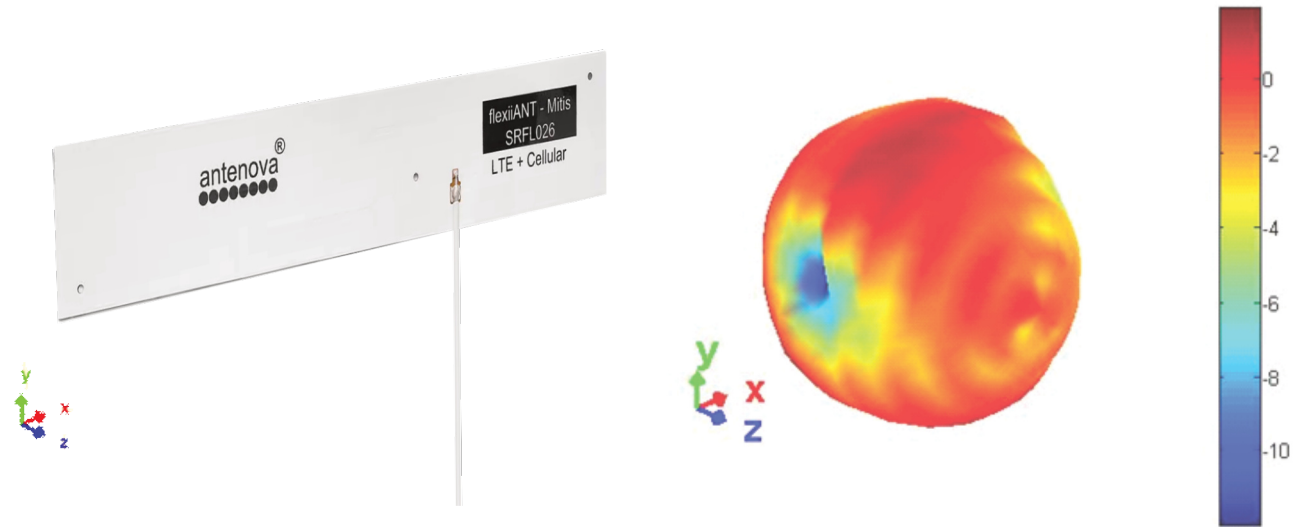


XY

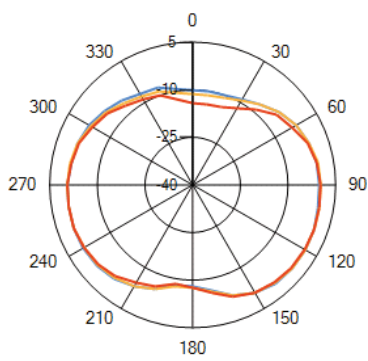

XZ

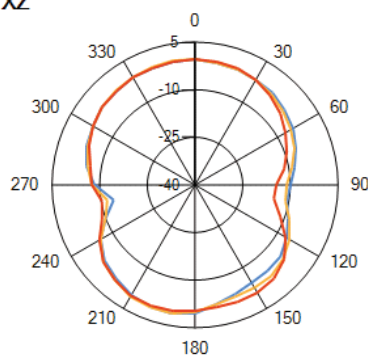


YZ

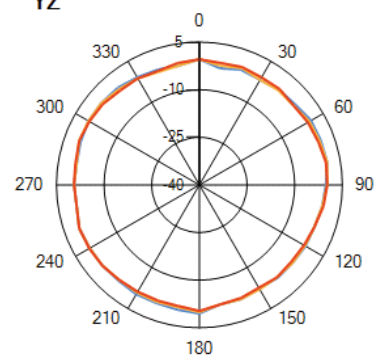


— 824MHz — 880MHz — 960MHz

### 6.4.3. 1710 MHz – 2170 MHz


3D pattern at 1990 MHz

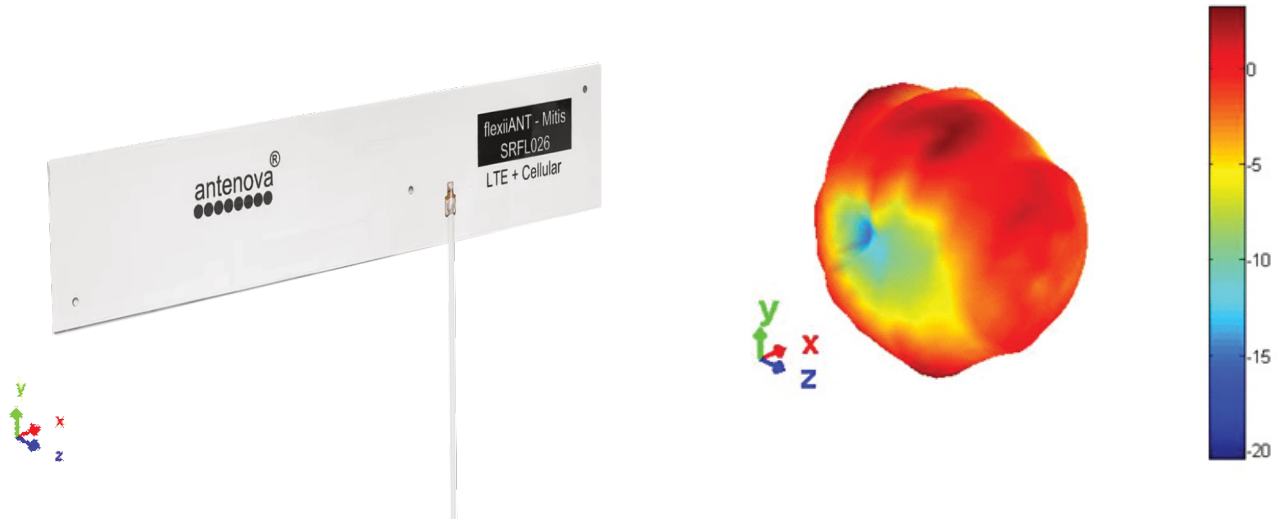


XY

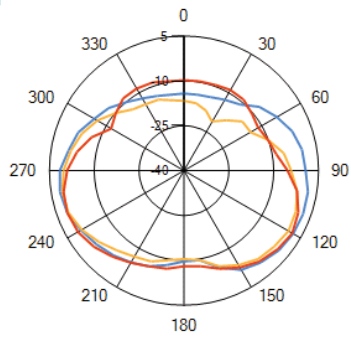

XZ

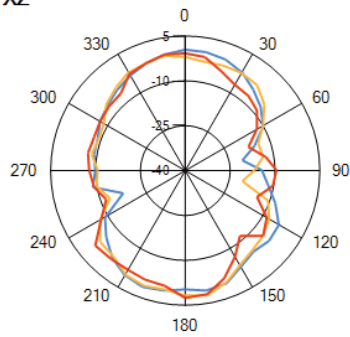



YZ

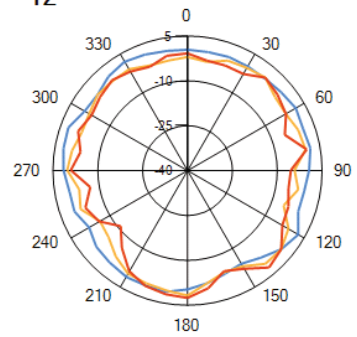

— 1.71GHz — 1.99GHz — 2.17GHz


### 6.4.4. 2300 MHz – 2400 MHz

3D pattern at 2350 MHz

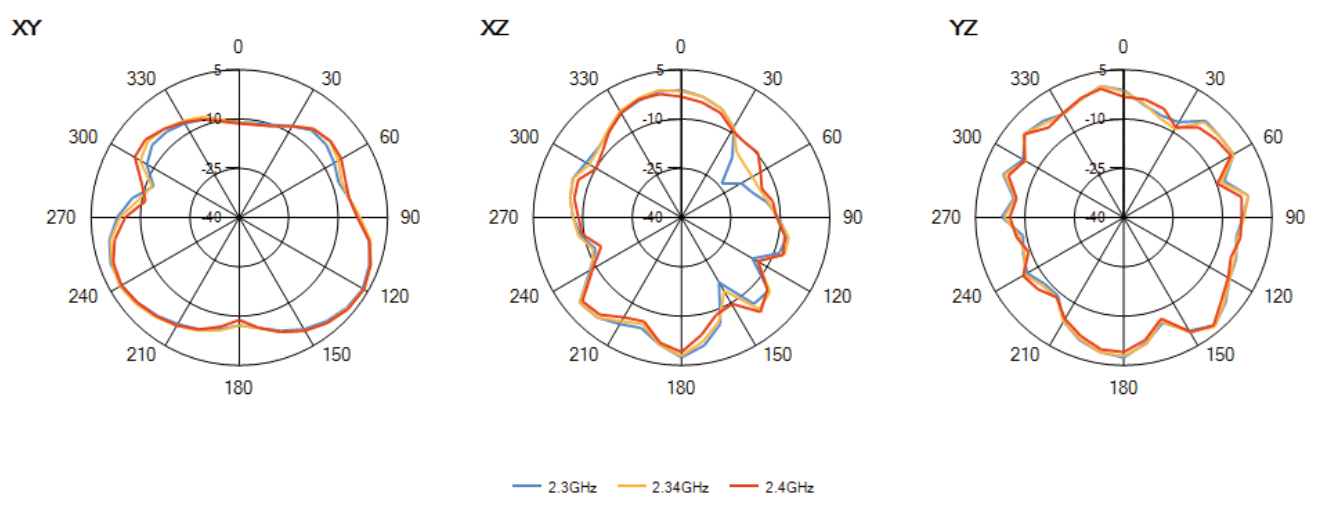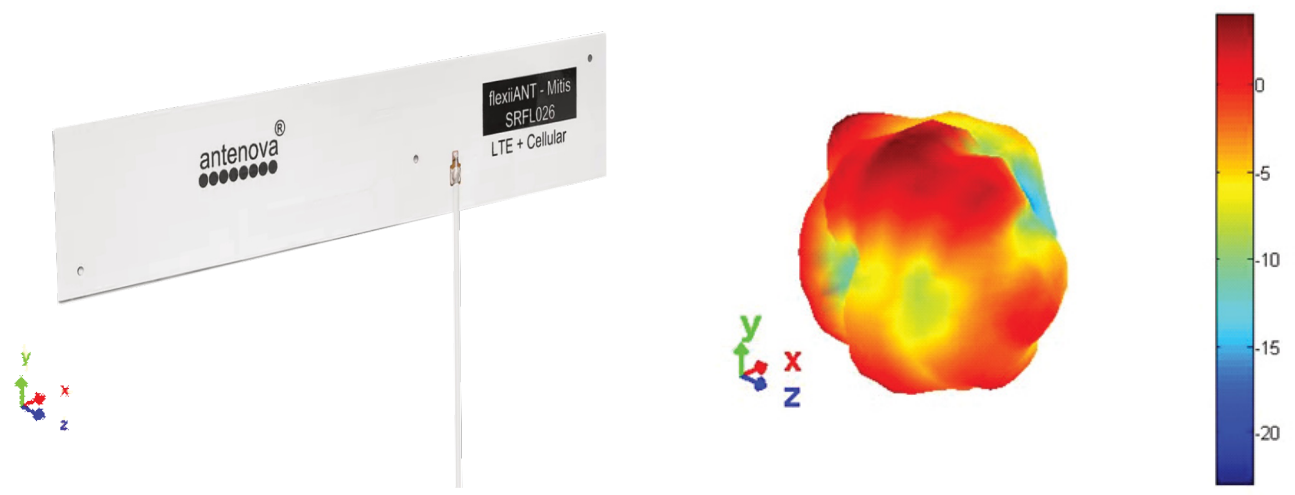


### 6.4.5. 2500 MHz – 2690 MHz


3D pattern at 2600 MHz

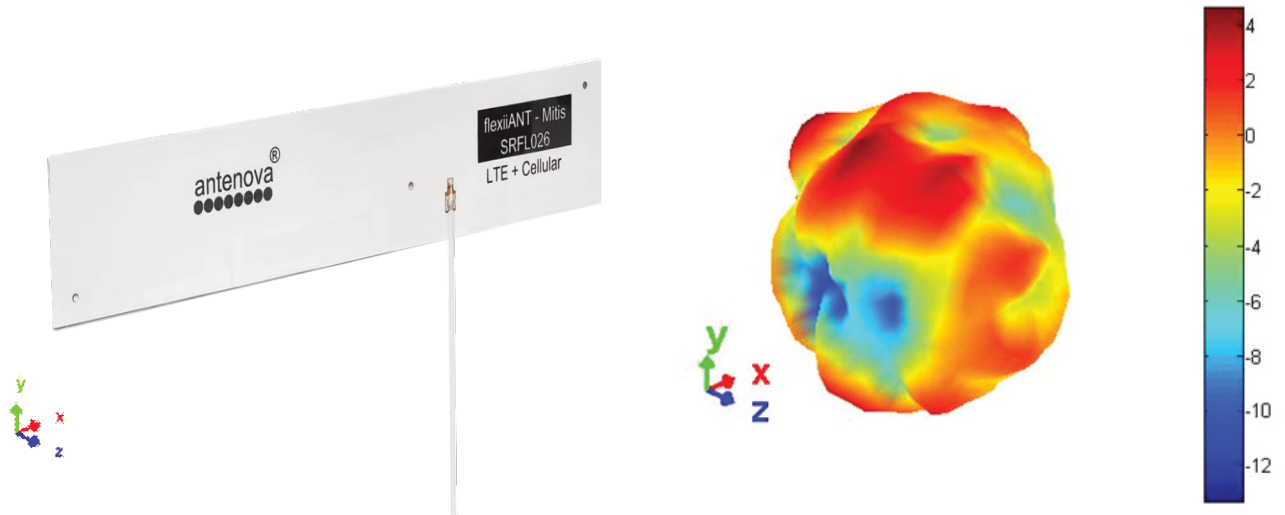


XY

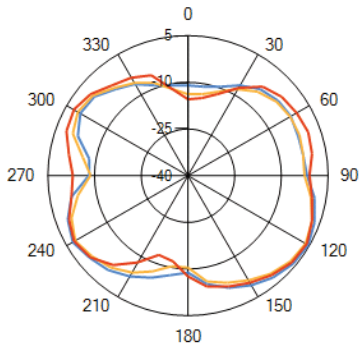

XZ

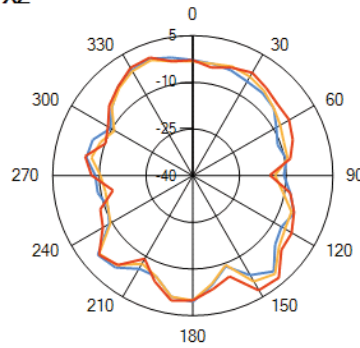


YZ

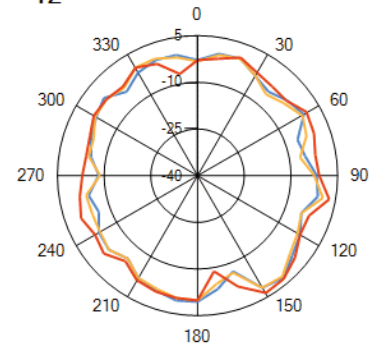

— 2.5GHz — 2.58GHz — 2.69GHz

## 7. Antenna dimensions


### 7.1. Dimensions FPC section

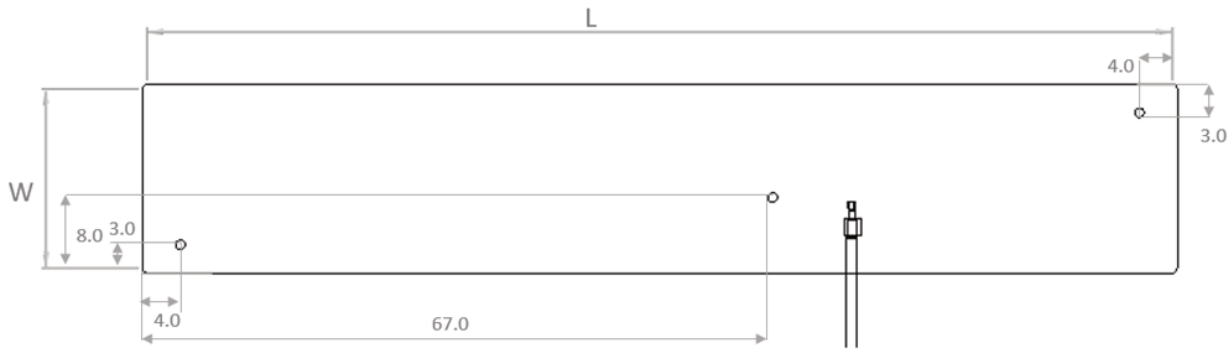

L	W	T
Length	Width	Thickness
110.0 ±0.2	20.0 ±0.2	0.15 (nominal)

All dimensions in (mm)

### 7.2. Dimensions assembled

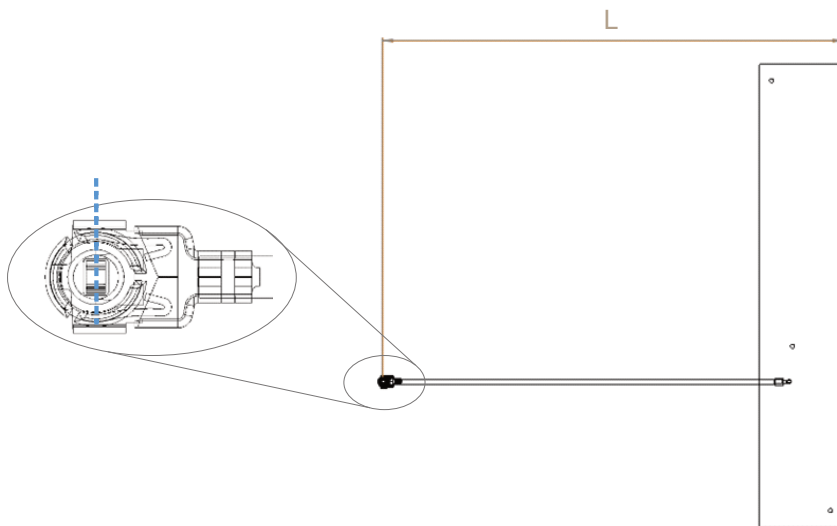


SRFLO61-100	SRFLO61-200
Length	Length
112 ±2.0	212 ±2.0

All dimensions in (mm)

Standard cable length for this antenna is 100mm and 200mm


### 7.3. I-PEX connector MHF1 (20278-112R-13)

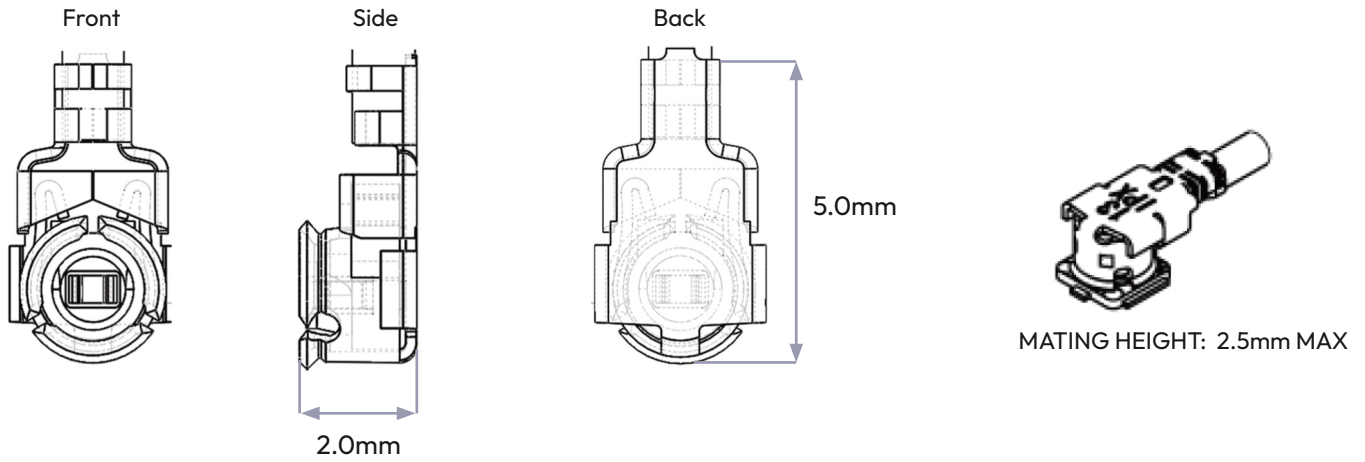

I-PEX	
Material	Copper alloy
Plating	Ag

All dimensions in (mm)

### 7.4. Assembly

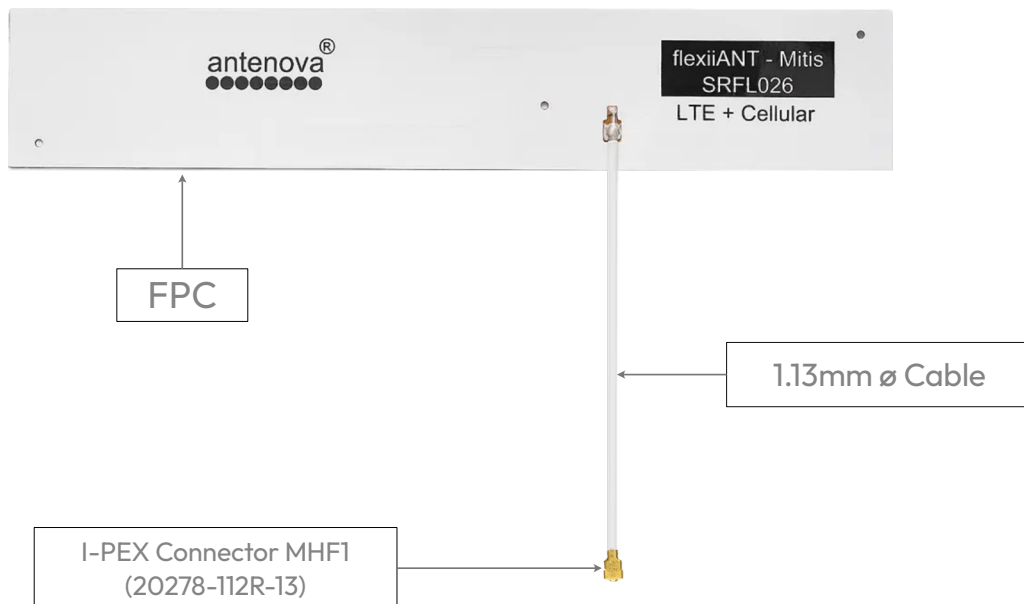

## 8. Electrical interface

---

### 8.1. Host interface

The host PCB requires the mating connector which is the I-PEX MHF (UFL) receptacle. The location should be close to the chip/modules pin for the RF. Any feed from this receptacle should be maintained at 50Ω impedance

### 8.2. Transmission line


- Must have a characteristic impedance of 50Ω.
- Length should be kept to a minimum.
- Is recommended to be a co-planar waveguide: log on to [Antenova.com](http://Antenova.com) and try our [Transmission line calculator](#) to easily calculate the dimensions most suited to your requirements.
- Should have DC blocking capacitor (e.g. 220pF) placed in line to protect the RF front end.

## 9. Mechanical fixing

---

The antenna uses 3M 468MP adhesive on the reverse side of the FPC. The antenna has an easy access split line to peel off to reveal the adhesive side. It is designed for a one time fix to a clean smooth surface. The antenna is keyed with two 1mm locating holes for easy positioning.

FPC back side

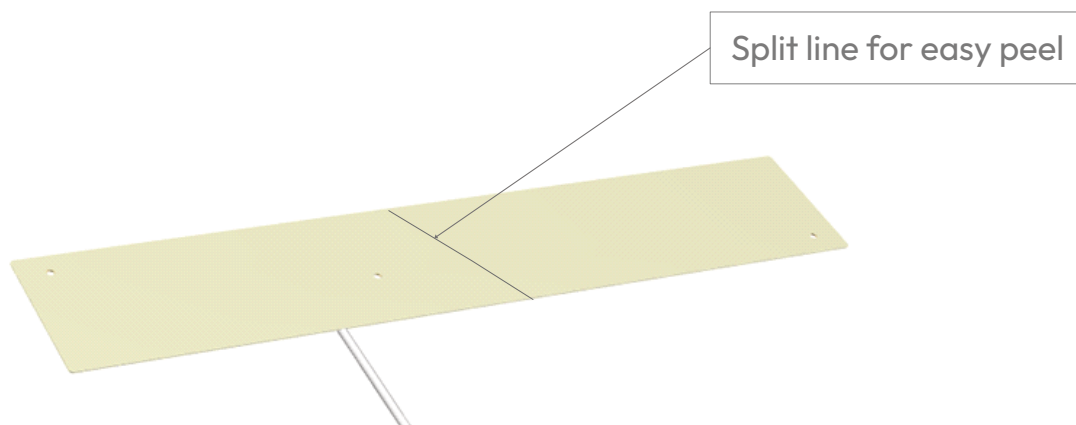

## 10. Antenna integration guide

We recommend the following during the design phase to maximise antenna performance and minimize noise:


- Minimum 4 layer PCB
- Route signals and power internally where possible
- Flood all layers with ground
- Knit ground on all layers together with plenty of vias

Follow placement guidance carefully, in addition Antenova provide technical support to help you through all stages of your design. Register for an account on <https://ask.antenova.com/> to access technical support.

### 10.1. Antenna placement

For FPC antennas the host PCB size is not critical to performance, however consideration must be given to placement. Using six spatial directions, as shown below, the antenna should ideally maintain a minimum of three directions free from obstruction in order to radiate effectively. Where there are obstructions (e.g. PCB, metal parts, battery etc.) a minimum clearance should still be maintained. These minimum clearances are described later in this section.

Six spatial directions relative to FPC

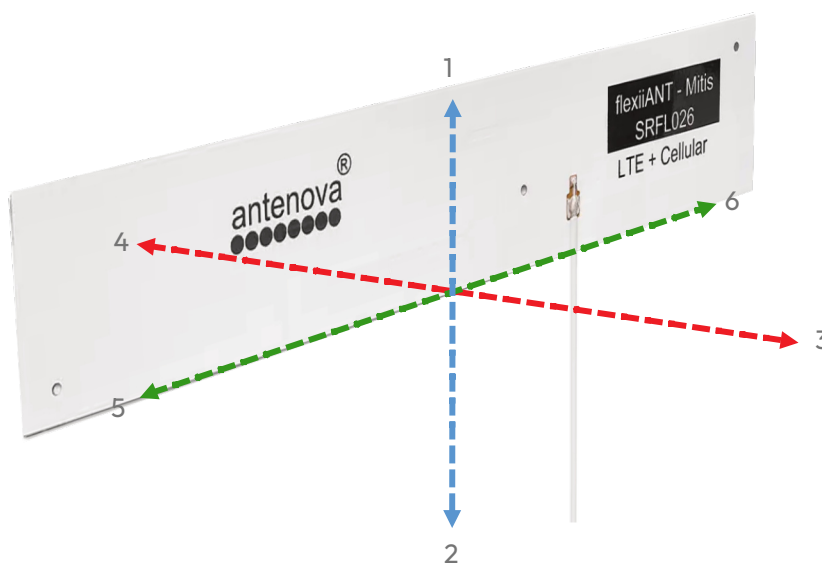


## 10.2. Orientation of FPC


The orientation of the FPC with respect to the host PCB should be defined depending on the unit. The proximity of the GND will have an influence on the antenna so the PCB location relative to the antenna should be considered.

The FPC will normally be placed in one of the three following options for orientation. In each option a distance (d) is the critical dimension to consider. The diagram below shows the minimum value of (d) for each. Other obstructions may increase this dimension.

Vertical mounted

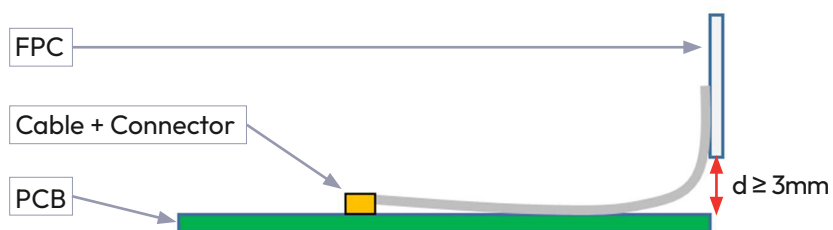

Co-planar to PCB

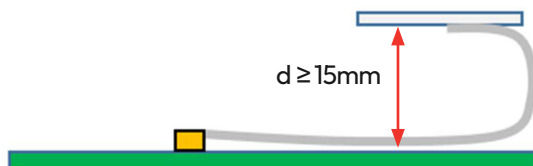

Planar to PCB (Same plane)



## 11. Hazardous material regulation conformance

---

The RF antenna module has been tested to conform to RoHS and REACH requirements. A certificate of conformance is available from Antenova's website.

## 12. Packaging


---

The antennas are stored within a plastic bag of 100 pcs.

100 units per bag (Labelled)

Single antenna per bag

100 units per bag (Labelled)

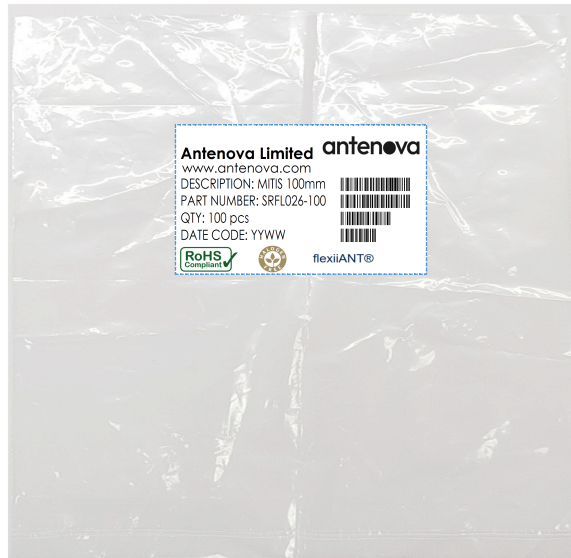

## 12.1. Optimal storage conditions

Temperature	-10°C to 40°C
Humidity	Less than 75% RH
Shelf life	18 Months
Storage place	Away from corrosive gas and direct sunlight
Packaging	Antennas should be stored in unopened sealed manufacturer’s plastic packaging.

Note: The shelf life of the antenna is 18 months, provided the bag of 100 pieces remains factory- sealed.

## 12.2. Label information

**Antenova Limited** **antenova**  
 www.antenova.com  
 DESCRIPTION: MITIS 100mm  
 PART NUMBER: SRFL026-100  
 QTY: 100 pcs  
 DATE CODE: YYWW









flexiiANT®

**Antenova Limited** **antenova**  
 www.antenova.com  
 DESCRIPTION: MITIS 200mm  
 PART NUMBER: SRFL026-200  
 QTY: 100 pcs  
 DATE CODE: YYWW








flexiiANT®

## Quality statements

Antenova's products conform to REACH and RoHS legislation. For our statements regarding these and other quality standards, please see [antenova.com](https://www.antenova.com).

Antenova reserves all rights to the contents of this document. Antenova gives no warranties based solely on the accuracy or completeness of the contents of this document and reserves the right to make changes to the specifications of the products described herein at any time and without notice.



## Datasheet version

2.01 release 27th May 2026

## Antenna design, integration and test resources

Product designers – the details contained in this datasheet will help you to complete your embedded antenna design. Please follow our technical advice carefully to obtain optimum antenna performance.

We aim to support our customers to create high performance wireless products. You will find a wealth of design resources, calculators and case studies to aid your design on our website.

Antenuova's design laboratories are equipped with the latest antenna design tools and test chambers. We provide antenna design, test and technical integration services to help you complete your design and obtain the required certifications.

If you cannot find the antenna you require in our product range, please contact us to discuss creating a custom antenna to meet your exact requirements.

Share knowledge with RF Experts around the world

ask.antenuova is a global forum for designers and engineers working with wireless technology

[Visit Ask.Antenuova](#)

Visit [antenuova.com](http://antenuova.com)

Order antenna samples and evaluation boards, and read our antenna resources

[Visit antenuova.com](http://antenuova.com)

Request a volume quotation for antennas:

[sales@antenuova.com](mailto:sales@antenuova.com)

+ 44 (0) 23 9400 1023

Global headquarters

**Antenuova Ltd, 7 The Briars,  
Waterberry Drive, Waterlooville,  
Hampshire, PO7 7YH**