

DATASHEET

Nitida

SRE3W084-S9R • TERMINAL®

SRE3W084-S9P • TERMINAL®



Features

- Terminal antenna for Wi-Fi6E & WiFi7 bands: 2.4-2.5GHz, 4.9-5.9GHz & 5.925-7.125GHz
- 802.11a/b/g/j/n/ac/ax
- The 5.925-7.125GHz band for Wi-Fi6E & WiFi7 provides 1200MHz additional bandwidth
- Terminal antenna is fitted on the outside of the product enclosure.

1. Description

Nitida is a Terminal Mount antenna for the Wi-Fi6E/WiFi7 bands. The Nitida antenna is fitted on the outside of the product enclosure with a SMA connector. The antenna covers the Wi-Fi6E & WiFi7 bands: 2.4-2.5 GHz, 4.9- 5.9GHz and 5.925-7.125GHz.

2. Applications

- WiFi6E/7 Routers
- WiFi6E/7 Portable Devices
- WiFi6E/7 surveillance cameras
- WiFi6E/7 dongles
- Game Consoles/Set-Top Boxes
- Network Devices

3. General data

Frequency	2400-2500MHz 4900-5900MHz 5925-7125MHz
Polarization	Linear
Operating temperature	-20°C to +65°C
Environmental condition test	ISO16750-4 5.1.1./5.1.2
Impedance with matching	50 Ω
Weight	15g
Antenna type	SMA Plug Reverse (Standard)
Dimensions	123.7 x 12.7 x 12.1 (mm ³)
Radome material	PC+PBT

4. Part number

SRE3W084-S9R

SRE3W084-S9P

PN	Connector
SRE3W084-S9R	SMA Plug Reverse (Standard)
SRE3W084-S9P	SMA Plug



Please contact Antenna for details on non-standard connector types


5. RF characteristics

Frequency	2400– 2500 MHz	4900 – 5900 MHz	5925 – 7125 MHz
Peak gain	3.1dBi	5.2dBi	5.0dBi
Average gain (Linear)	-1.5dB	-1.9 dB	-1.7 dB
Average efficiency	70.0 %	60.0 %	55.0 %
Average efficiency	-13dB	-14dB	-8dB
Maximum VSWR	1.6:1	1.8:1	2.3:1


All data measured on SRE3W084 in free space.

6. RF performance

6.1. Return loss

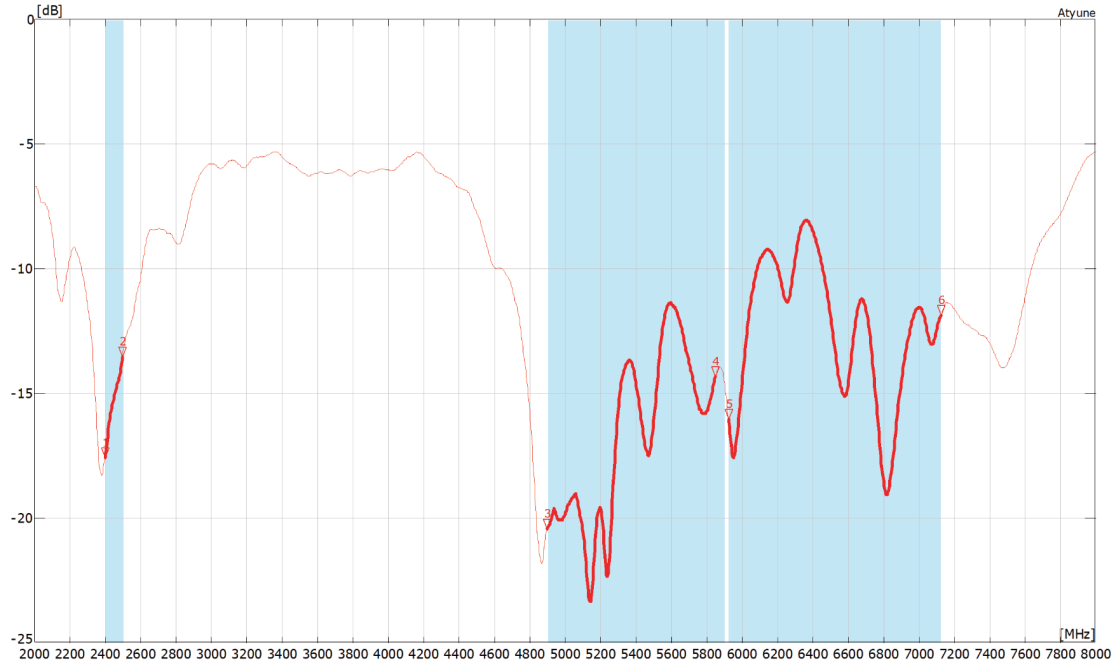


6.2. VSWR

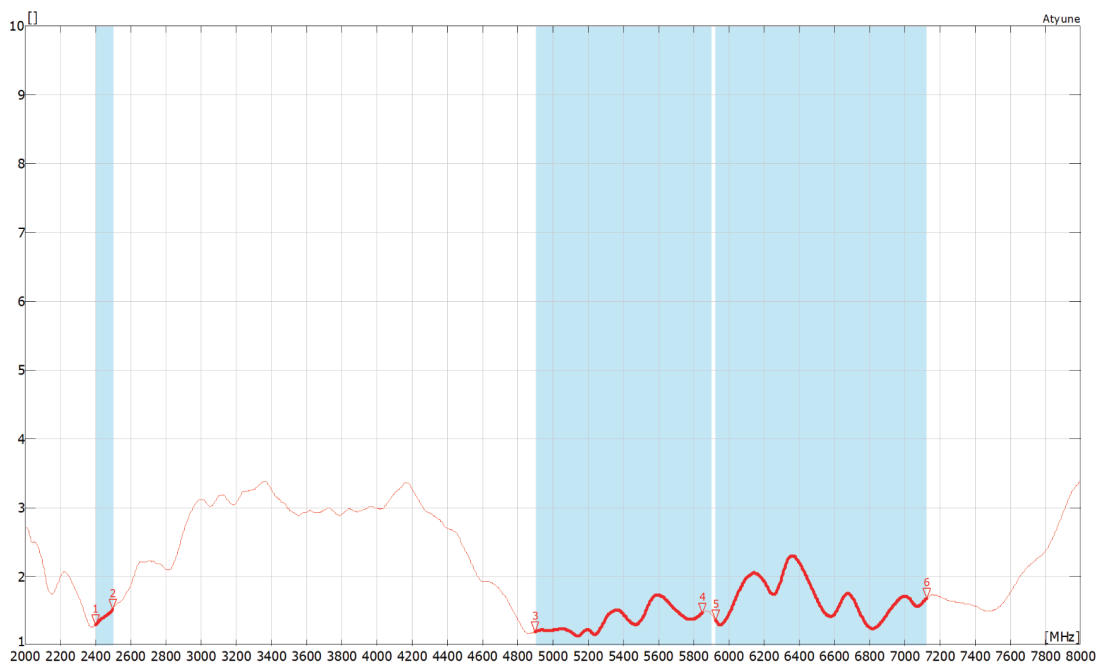

All data measured on SRE3W084 in free space

6.3. Efficiency




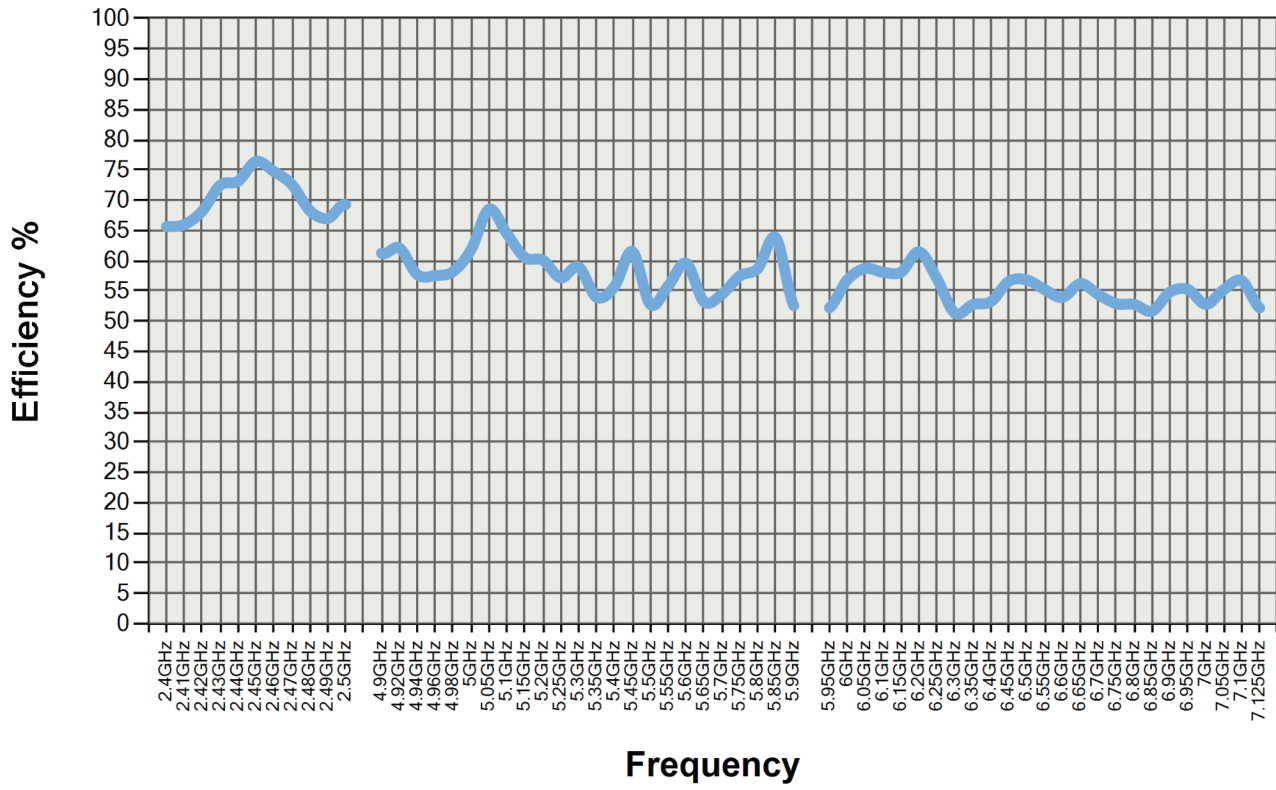


All data measured on SRE3W084 in free space

6.4. Antenna Pattern Free Space

6.4.1. 2400MHz ~ 2500MHz



3D pattern at 2450MHz

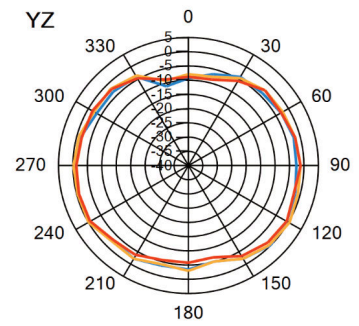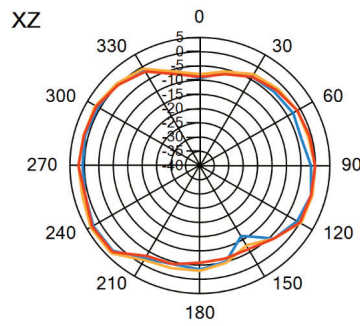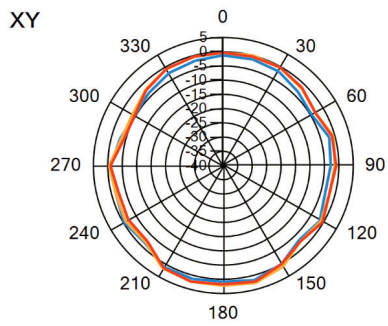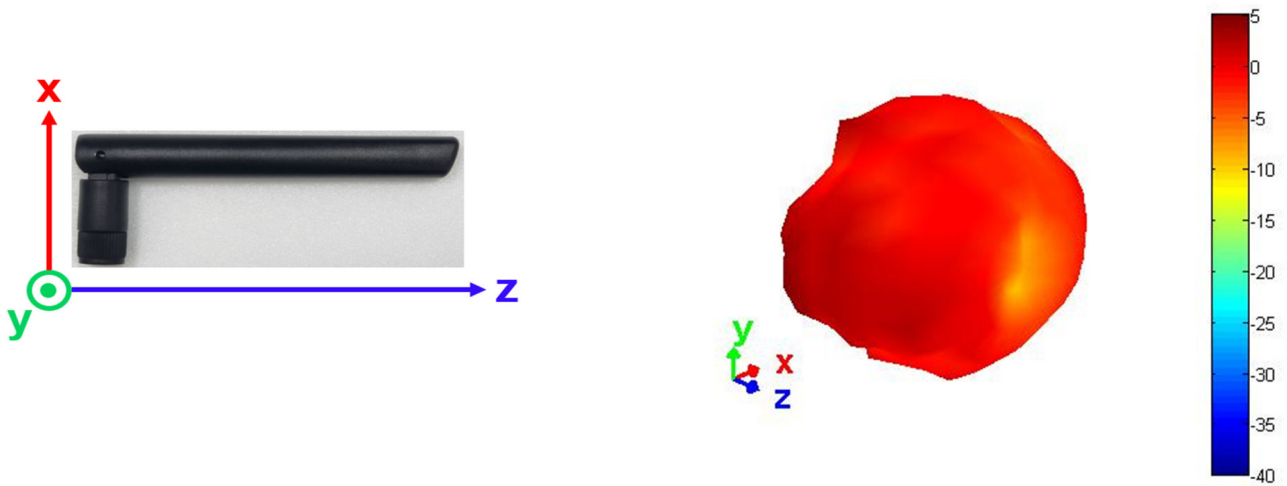

— 2.4GHz — 2.45GHz — 2.5GHz





6.4.2. 4900MHz ~ 5900MHz

3D pattern at 5500MHz

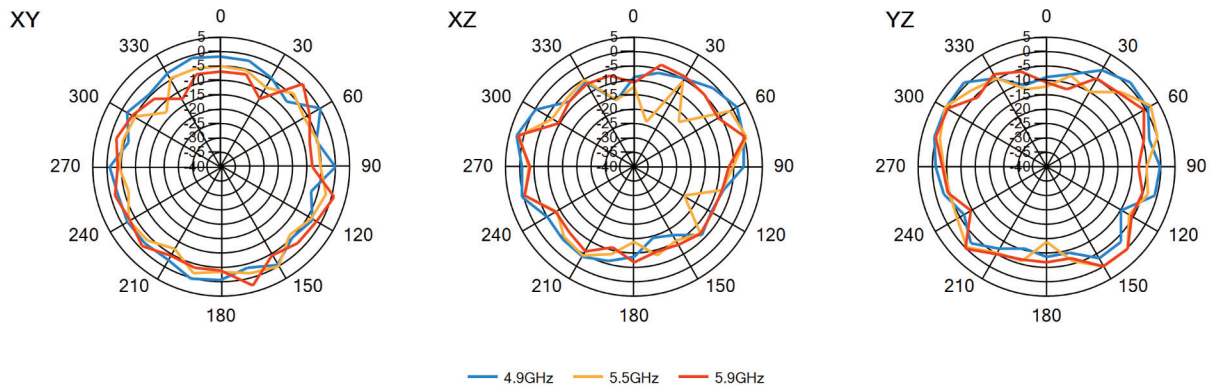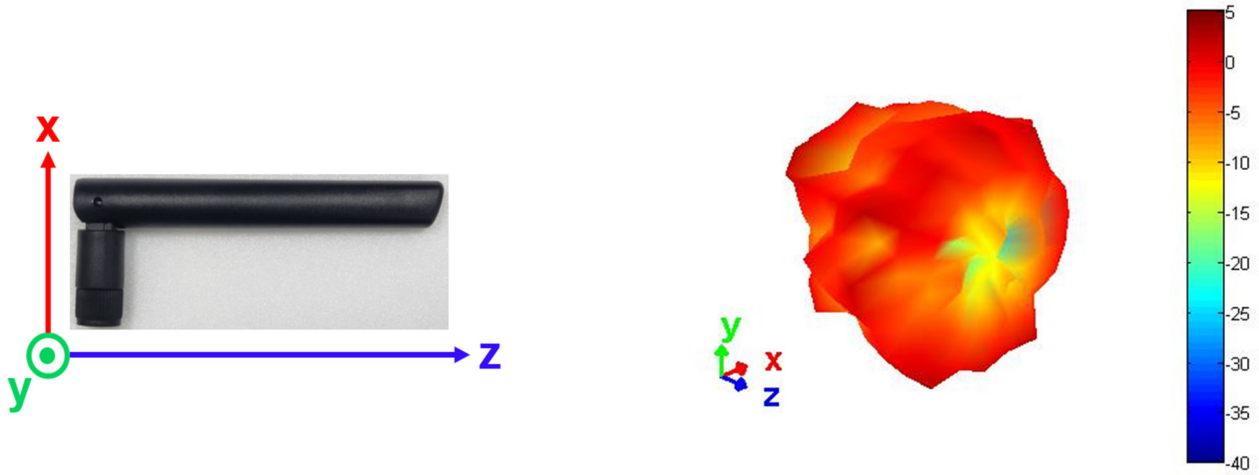


6.4.3. 5925MHz ~ 7125MHz

3D pattern at 6500MHz

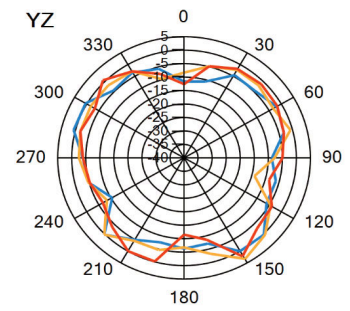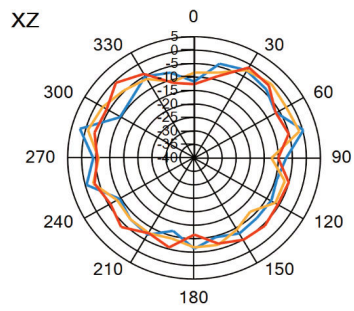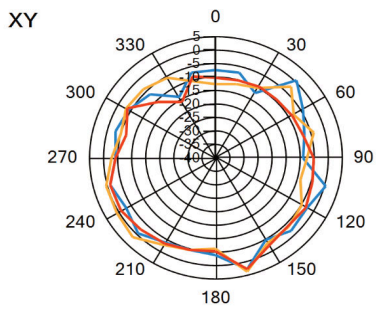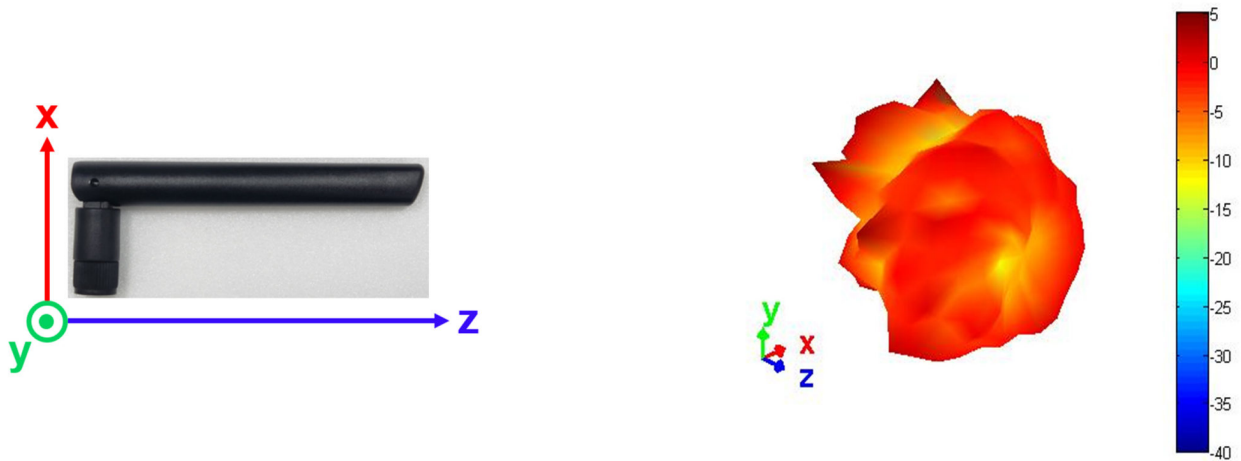

— 5.95GHz — 6.5GHz — 7.125GHz

7. Antenna dimensions

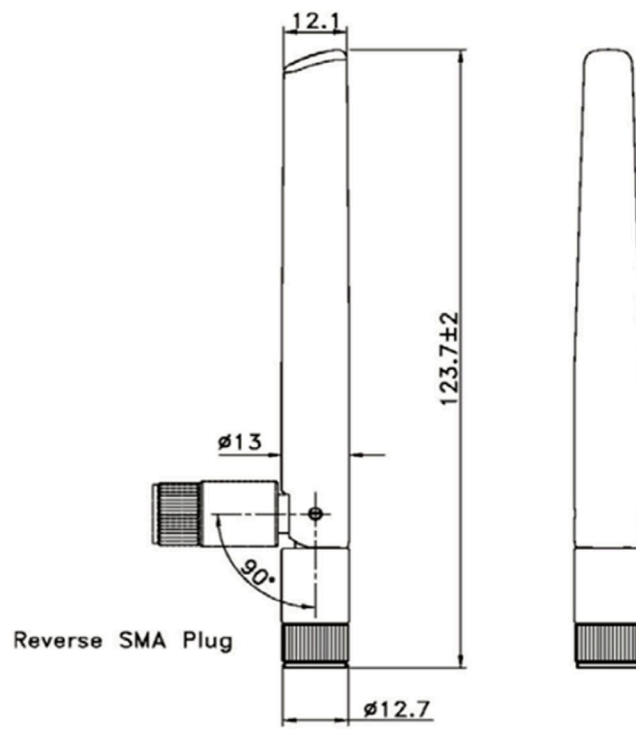

All dimensions in (mm)

8. Hazardous Material Regulation Conformance


The antenna has been tested to conform to RoHS requirements.
A certificate of conformance is available from Antenova's website.

9. Packaging

The antennas are stored within a plastic bag

One piece in small bag

50pcs in one larger plastic bag with label

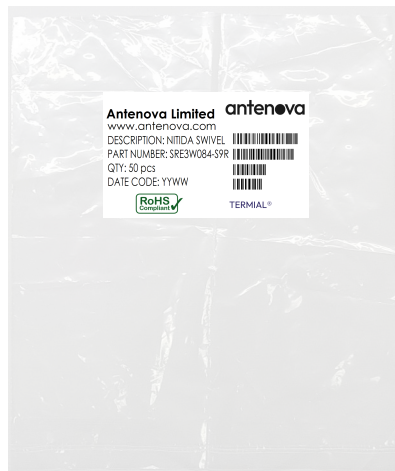


9.1. Optimal Storage conditions

Temperature	-10°C to 40°C
Humidity	Less than 75% RH
Shelf life	18 Months
Storage place	Away from corrosive gas and direct sunlight
Packaging	Antennas should be stored in unopened sealed manufacturer's plastic packaging.

Note:
The shelf life of the antenna is 18 months, provided the bag of 50 pieces remains factory- sealed.

9.2. Box Dimension and label

The outer box contains 500 antennas with label

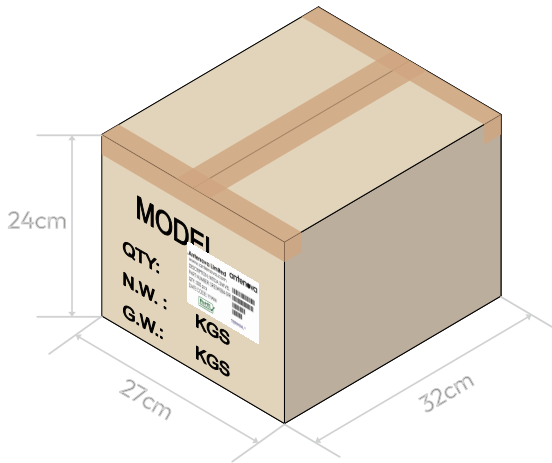

Width	Breath	Height
W	B	H
32cm	27cm	24cm

9.3. Label Information

Antenova Limited **antenova**
 www.antenova.com
 DESCRIPTION: NITIDA SWIVEL 
 PART NUMBER: SRE3W084-S9R 
 QTY: 50 pcs 
 DATE CODE: YYWW 
 

Antenova Limited **antenova**
 www.antenova.com
 DESCRIPTION: NITIDA SWIVEL 
 PART NUMBER: SRE3W084-S9P 
 QTY: 50 pcs 
 DATE CODE: YYWW 
 

Quality statements

Antenova's products conform to REACH and RoHS legislation. For our statements regarding these and other quality standards, please see antenova.com.

Antenova reserves all rights to the contents of this document. Antenova gives no warranties based solely on the accuracy or completeness of the contents of this document and reserves the right to make changes to the specifications of the products described herein at any time and without notice.



Datasheet version

2.04 release 9th April 2026

Antenna design, integration and test resources

Product designers – the details contained in this datasheet will help you to complete your embedded antenna design. Please follow our technical advice carefully to obtain optimum antenna performance.

We aim to support our customers to create high performance wireless products. You will find a wealth of design resources, calculators and case studies to aid your design on our website.

Antenuova's design laboratories are equipped with the latest antenna design tools and test chambers. We provide antenna design, test and technical integration services to help you complete your design and obtain the required certifications.

If you cannot find the antenna you require in our product range, please contact us to discuss creating a custom antenna to meet your exact requirements.

Share knowledge with RF Experts around the world

ask.antenuova is a global forum for designers and engineers working with wireless technology

[Visit Ask.Antenuova](#)

Visit antenuova.com

Order antenna samples and evaluation boards, and read our antenna resources

[Visit antenuova.com](http://antenuova.com)

Request a volume quotation for antennas:

sales@antenuova.com

+ 44 (0) 23 9400 1023

Global headquarters

**Antenuova Ltd, 7 The Briars,
Waterberry Drive, Waterlooville,
Hampshire, PO7 7YH**